


Fold Line Here.
(Underside of
Frame Head).

TS5.224V Fig. 6
Left Hand Hung.

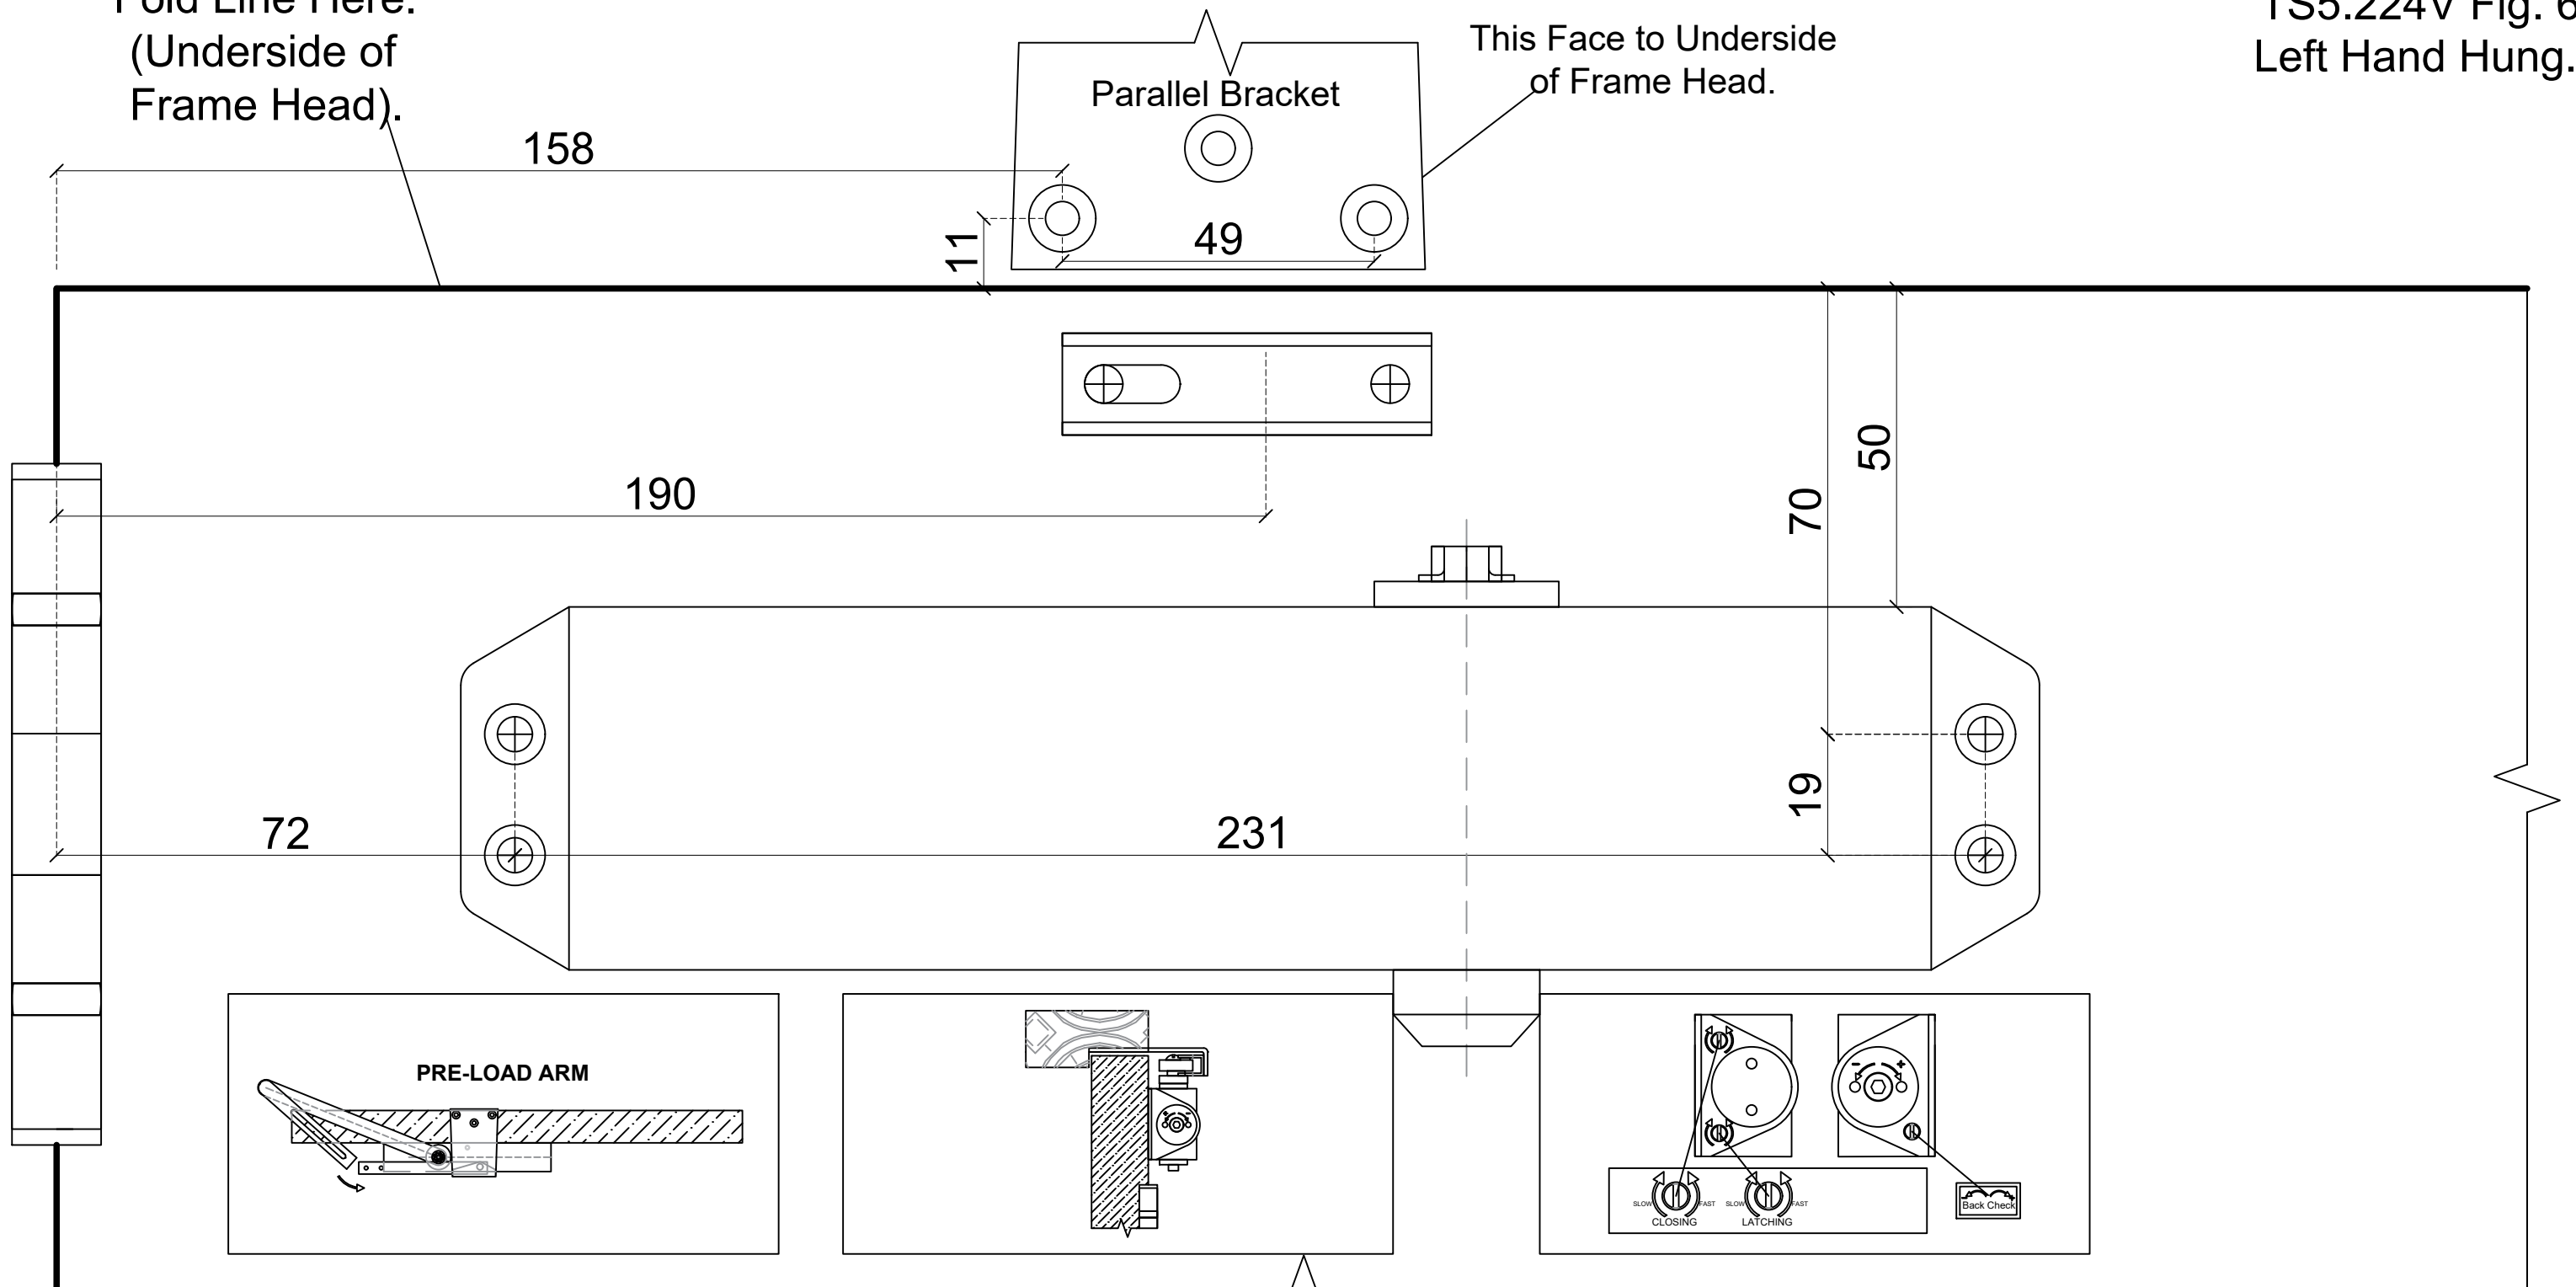

This Face to Underside
of Frame Head.

Parallel Bracket

49

158

190

72

231

70
50

19

PRE-LOAD ARM

Power Adjustment
* : FACTORY PRE-SET

This Template Covers Regular Parallel Arm Installation to 105°

2-4 Model		
N° of Turns	Direction	Size
3	-	2
0	*	3
3	+	4


EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
1	750mm	20 Kg
2	850mm	40 Kg
3	950mm	60 Kg
4	1100mm	80 Kg
5	1250mm	100 Kg
6	1400mm	120 Kg



CE	Boss Door Controls Ltd 3 & 4 Rutherford Square Brucefield Industry Park LIVINGSTON, West Lothian EH54 9BU, United Kingdom	BOSS TS5.224V					
		2019					
1121-CPR-AD5423	FIG 6 EN 1154:1996+A1:2002/2006	3	8	3/4	1	1	3



TS5.224V Fig. 6
Right Hand Hung.

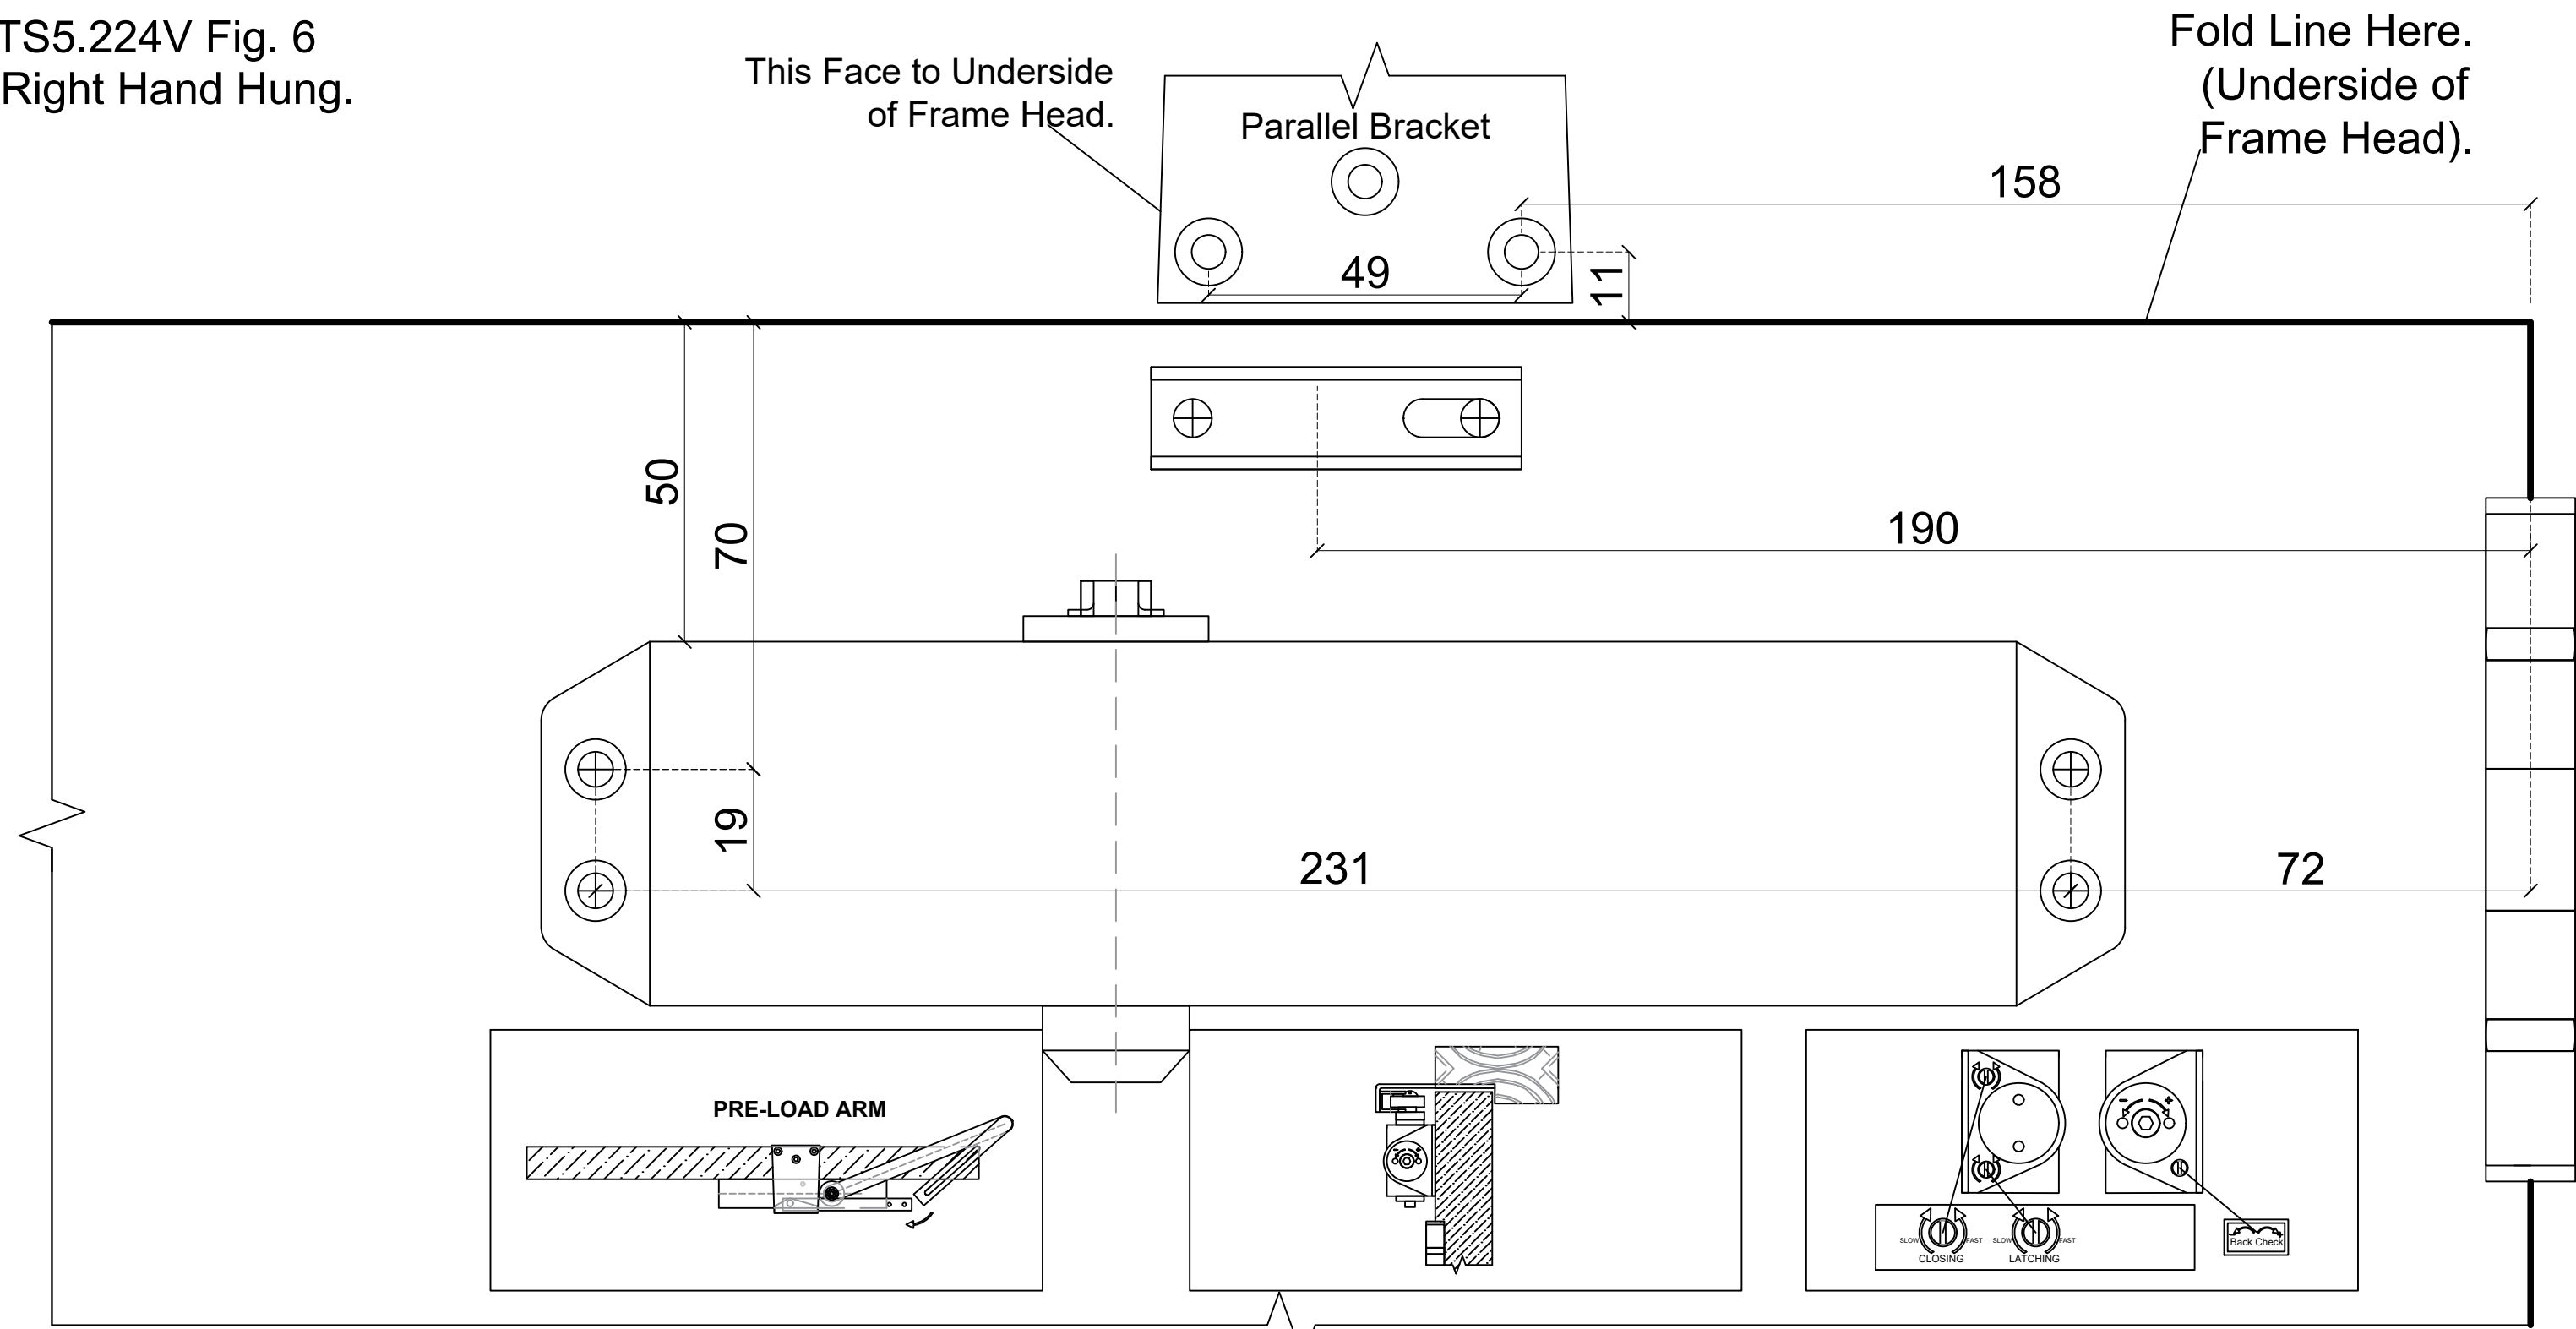

2-4 Model		
N° of Turns	Direction	Size
3	-	2
0	*	3
3	+	4


Power Adjustment
* : FACTORY PRE-SET

	Boss Door Controls Ltd 3 & 4 Rutherford Square Brucefield Industry Park LIVINGSTON, West Lothian EH54 9BU, United Kingdom	BOSS TS5.224V					
		2019					
1121-CPR-AD5423	FIG 6 EN 1154:1996+A1:2002/2006	3	8	3/4	1	1	3

This Template Covers Regular Parallel Arm Installation to 105°

EN1154		
Door Closer Power Size	Recommended Door Leaf Width Max mm	Test Door Mass (Kg)
1	750mm	20 Kg
2	850mm	40 Kg
3	950mm	60 Kg
4	1100mm	80 Kg
5	1250mm	100 Kg
6	1400mm	120 Kg

